
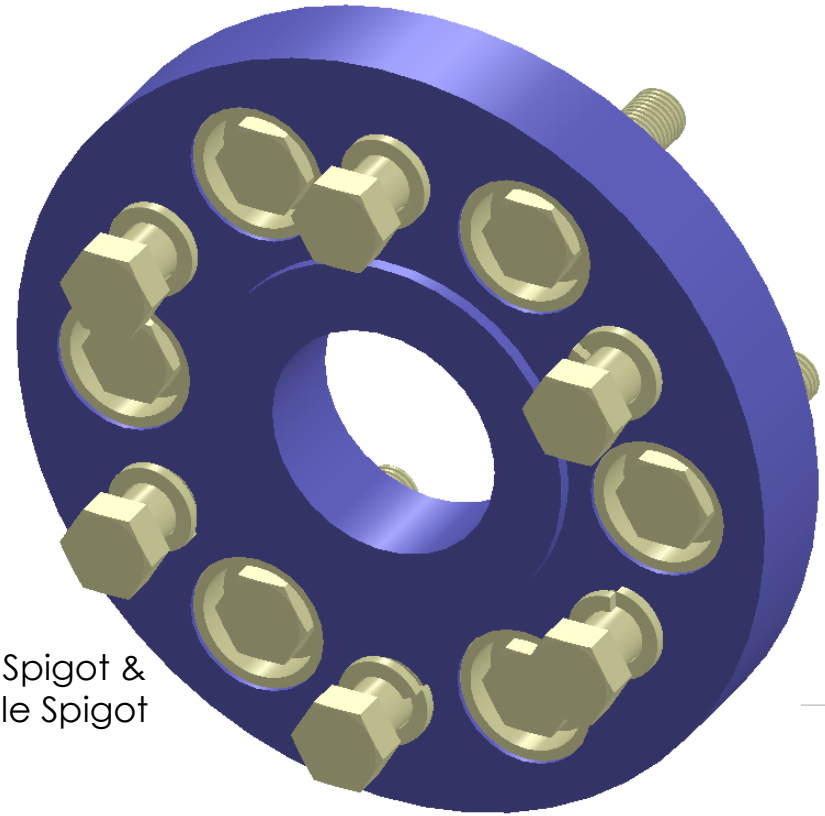


- ① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off
- ② M24 X 70mm Hex Bolt & S/W - Bolt Grade 8 HT - 6 off
- ③ M24 x 100mm Hex Bolt, Nut & S/W - Bolt Grade 8 HT - 6 off

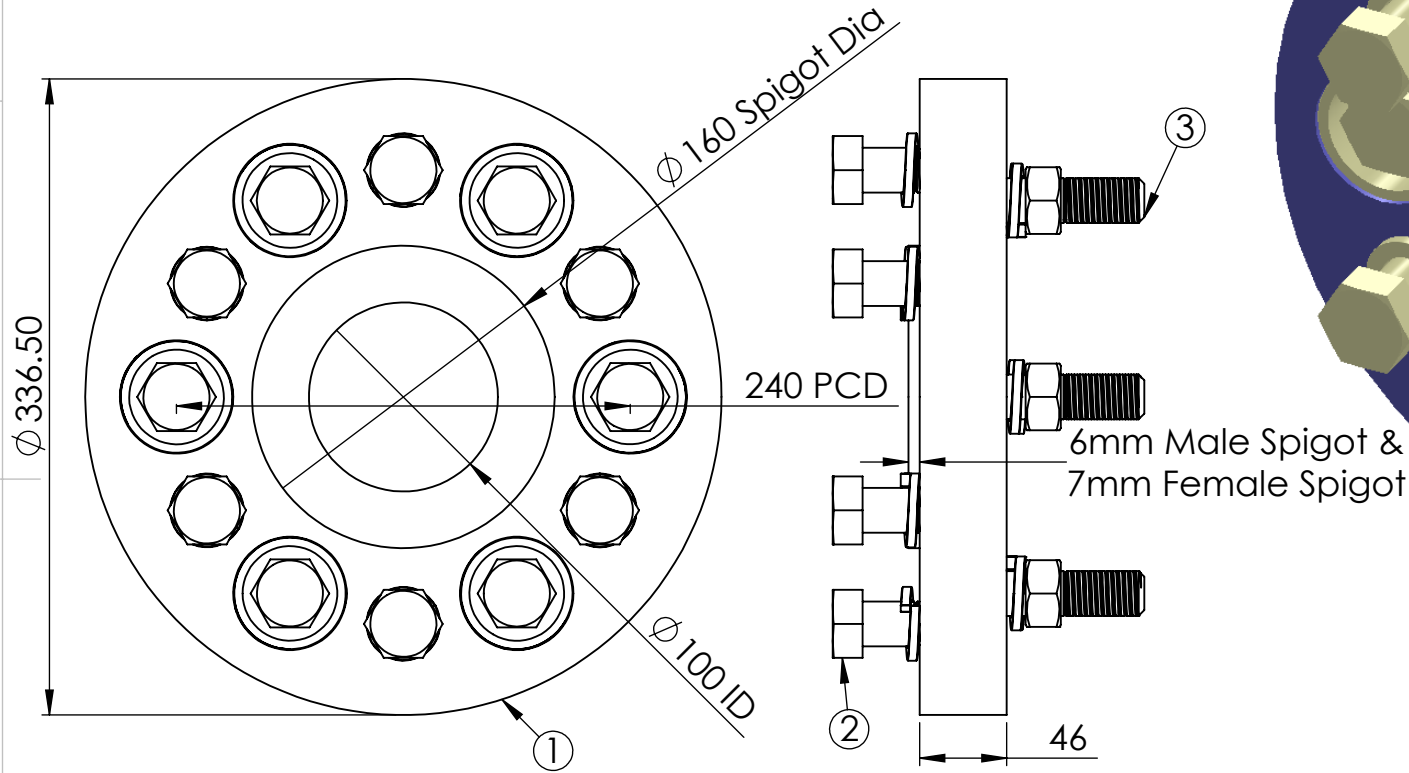

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 SURFACE FINISH:  
 TOLERANCES:  
 LINEAR: +/-0.25  
 ANGULAR: +/-0.25

DO NOT SCALE DRAWING REVISION A

COMMENTS: Suits: Dong-I DMT-170 HL

TITLE: Poly Flex Flexible Coupling 24160-4-95 M24

DWG NO. 24160-M24-4-95 Flexible Coupling A4

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		30/05/2013
CHK'D	O.Knust		30/05/2013
APPV'D			
MFG			
Q.A			

MATERIAL: 95A Polyurethane

SCALE:1:5 SHEET 1 OF 1

**PROPRIETARY & CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.